

This standard detail is intended for general information only and all details should be checked against all relevant supporting test evidence, certification and installation guidelines
In line with the company's policy of continual development, details are subject to change and/ or withdrawal therefore you must ensure this is the latest published detail and instructions.

Additional Instructions

The floor must have a minimum thickness of 150mm and comprise of concrete, aerated or concrete, with a minimum density of 670kg/m³.


Follow the installation steps referenced in the [QuelStop Fire Batt installation guidance](#) document.

This detail can be installed from the underside only.

Multiple Service Penetrations: The total amount of cross section area of the services (including insulation) should not exceed 60% of the service penetration area.

Quelfire Products Required

Product Code	Description
QB50D	QuelStop Fire Batt
QUELCOIL	QuelCoil Continuous Intuwrap
QSS310	QuelStop Intumescent Acrylic Sealant
QSC5KG	QuelStop Ablative Coating 5kg tub

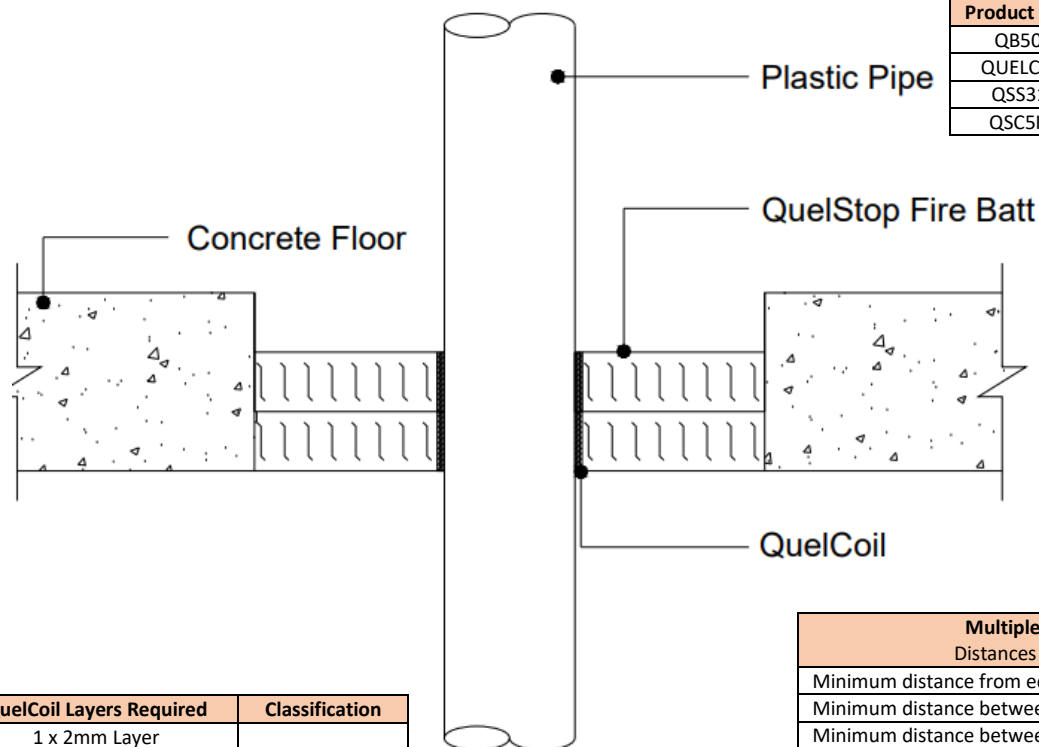

Aperture Size	Page No.
400 x 400mm	1
1100 x 1500mm	2

Service Type	Size of Services	Pipe Wall Thickness	QuelCoil Layers Required	Classification
U-PVC	≤Ø50mm	2.4mm	1 x 2mm Layer	EI 120 U/C
	Ø51 – Ø75mm	2.5 – 4.2mm	2 x 2mm Layers	
	Ø76 – Ø110mm	4.2 – 6.6mm	3 x 2mm Layers	
PE, PE-X, ABS, SAN-PVC* Pipe	≤Ø50mm	3.0mm	1 x 2mm Layer	
	Ø51 - Ø75mm	3.1 - 5.9mm	2 x 2mm Layers	
	Ø76 - Ø110mm	3.4 - 10.0mm	3 x 2mm Layers	
PP	≤Ø50mm	2.0mm	1 x 2mm Layer	
	Ø51 - Ø75mm	2.1 – 5.3mm	2 x 2mm Layers	
	Ø76 - Ø110mm	2.7 - 10.0mm	3 x 2mm Layers	

*PE in accordance with EN1519-1, EN1266-1, EN 12201-2 and EN ISO 15494, PE-X in accordance with EN ISO 15875-2, ABS in accordance with EN 1455-1 and EN ISO 15493 as well as SAN+PVC in accordance with ISO 19220

Multiple Service Penetration Spacing

Distances are from edge of fire stop seal

Minimum distance from edge of opening	0mm
Minimum distance between Services within the table shown	0mm
Minimum distance between other Service types	100mm

To be read in conjunction with:	UL Classification Report 4790517197 Issue 3 , Pages 282, 283 & 287
Test & Classification standard:	BS EN1366-3 & EN13501-2
Substrate minimum thickness:	150mm
First Service Support:	≤400mm
Maximum Aperture:	400mm wide x 400mm long
Drawing Scale:	Not to Scale
Issue Number:	3
Date of Issue:	June 2025
Detail Reference:	QB-CF150-D-06

Important Information:

- The supporting construction must be installed in accordance with the manufacturer's guidelines and must be capable of achieving the required fire rating of the firestop.
- All Services should be adequately supported on both sides of the firestop to ensure that no load is transferred onto the firestop seal.

Scope and Liability:

- Any information provided by or on behalf of Quelfire Limited is provided for general information only. It is not intended to amount to advice on which you should rely. You must obtain professional or specialist advice before taking, or refraining from, any recommendation or action.
- The summary is not exhaustive and does not consider all issues relevant to the enquiry. It is limited to the information and time available to us. We have not verified any information made available to us by you or any other source, nor have we carried out a physical inspection of any property. We make no representations, warranties or guarantees, whether expressed or implied, that any information is accurate, complete or up to date.
- We do not accept a duty of care to you or any other person in respect of the enquiry, nor do we accept any liability to you or any other person for any loss arising out of or in connection with the enquiry or any reply provided by us. Different limitations and exclusions of liability arising as a result of the supply of any products or services by us to you, and these will be set out in our terms and conditions of supply, a copy of which is available on request.
- Full terms and conditions of sale are available at <https://www.quelfire.co.uk/terms-conditions-of-sale/>

QB-CF150-D-06

Plastic pipe penetrating a rigid floor (150mm or thicker)



This standard detail is intended for general information only and all details should be checked against all relevant supporting test evidence, certification and installation guidelines. In line with the company's policy of continual development, details are subject to change and/ or withdrawal therefore you must ensure this is the latest published detail and instructions.

Additional Instructions


The floor must have a minimum thickness of 150mm and comprise of concrete, aerated or concrete, with a minimum density of 670kg/m³.

Follow the installation steps referenced in the [QuelStop Fire Batt installation guidance](#) document.

This detail can be installed from the underside only.

Multiple Service Penetrations: The total amount of cross section area of the services (including insulation) should not exceed 60% of the service penetration area.

Quelfire Products Required	
Product Code	Description
QB50D	QuelStop Fire Batt
QUELCOIL	QuelCoil Continuous Intuwrap
QSS310	QuelStop Intumescent Acrylic Sealant
QSC5KG	QuelStop Ablative Coating 5kg tub

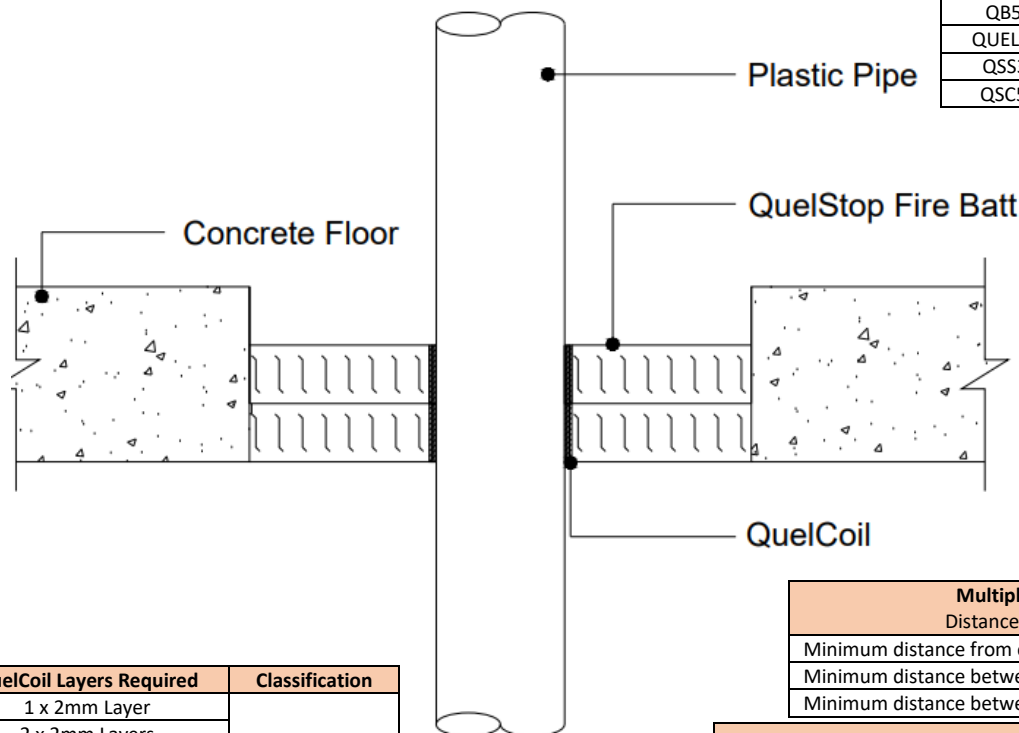

Aperture Size	Page No.
400 x 400mm	1
1100 x 1500mm	2

Service Type	Size of Services	Pipe Wall Thickness	QuelCoil Layers Required	Classification
U-PVC	≤Ø50mm	2.4mm	1 x 2mm Layer	EI 60 U/C
	Ø51 – Ø75mm	2.5 – 4.2mm	2 x 2mm Layers	
	Ø76 – Ø110mm	4.2 – 6.6mm	3 x 2mm Layers	
PE, PE-X, ABS, SAN-PVC* Pipe	≤Ø50mm	3.0mm	1 x 2mm Layer	
	Ø51 - Ø75mm	3.1 - 5.9mm	2 x 2mm Layers	
	Ø76 - Ø110mm	3.4 - 10.0mm	3 x 2mm Layers	
PP	≤Ø50mm	2.0mm	1 x 2mm Layer	
	Ø51 - Ø75mm	2.1 – 5.3mm	2 x 2mm Layers	
	Ø76 - Ø110mm	2.7 - 10.0mm	3 x 2mm Layers	

*PE in accordance with EN1519-1, EN1266-1, EN 12201-2 and EN ISO 15494, PE-X in accordance with EN ISO 15875-2, ABS in accordance with EN 1455-1 and EN ISO 15493 as well as SAN+PVC in accordance with ISO 19220

Multiple Service Penetration Spacing	
Distances are from edge of fire stop seal	
Minimum distance from edge of opening	0mm
Minimum distance between Services within the table shown	0mm
Minimum distance between other Service types	100mm

To be read in conjunction with:	UL Classification Report 4790517197 Issue 3 , Pages 282, 283 & 288
Test & Classification standard:	BS EN1366-3 & EN13501-2
Substrate minimum thickness:	150mm
First Service Support:	≤400mm
Maximum Aperture:	1100mm wide x 1500mm long
Drawing Scale:	Not to Scale
Issue Number:	3
Date of Issue:	June 2025
Detail Reference:	QB-CF150-D-06

Important Information:

- The supporting construction must be installed in accordance with the manufacturer's guidelines and must be capable of achieving the required fire rating of the firestop.
- All Services should be adequately supported on both sides of the firestop to ensure that no load is transferred onto the firestop seal.

Scope and Liability:

- Any information provided by or on behalf of Quelfire Limited is provided for general information only. It is not intended to amount to advice on which you should rely. You must obtain professional or specialist advice before taking, or refraining from, any recommendation or action.
- The summary is not exhaustive and does not consider all issues relevant to the enquiry. It is limited to the information and time available to us. We have not verified any information made available to us by you or any other source, nor have we carried out a physical inspection of any property. We make no representations, warranties or guarantees, whether expressed or implied, that any information is accurate, complete or up to date.
- We do not accept a duty of care to you or any other person in respect of the enquiry, nor do we accept any liability to you or any other person for any loss arising out of or in connection with the enquiry or any reply provided by us. Different limitations and exclusions of liability arising as a result of the supply of any products or services by us to you, and these will be set out in our terms and conditions of supply, a copy of which is available on request.
- Full terms and conditions of sale are available at <https://www.quelfire.co.uk/terms-conditions-of-sale/>