

QIF-CF150-01

Plastic pipes penetrating a concrete floor (150mm or thicker)


This standard detail is intended for general information only and all details should be checked against all relevant supporting test evidence, certification and installation guidelines. In line with the company's policy of continual development, details are subject to change and/ or withdrawal therefore you must ensure this is the latest published detail and instructions.

Additional Instructions

The floor must have a minimum thickness of 150mm and comprise of concrete or aerated concrete, with a minimum density of 670kg/m³.

Once positioned correctly the perimeter of the QIF should be sealed with QuelStop Intumescent Acrylic Sealant.

BS EN 1366-3:2021 Section 13.7: The distance between the aperture edges of penetration seals in a building element shall be as tested or minimum 100mm. The distance between the aperture edge of a penetration seal and any other penetration (e.g., door) in a building element shall be minimum 200mm.

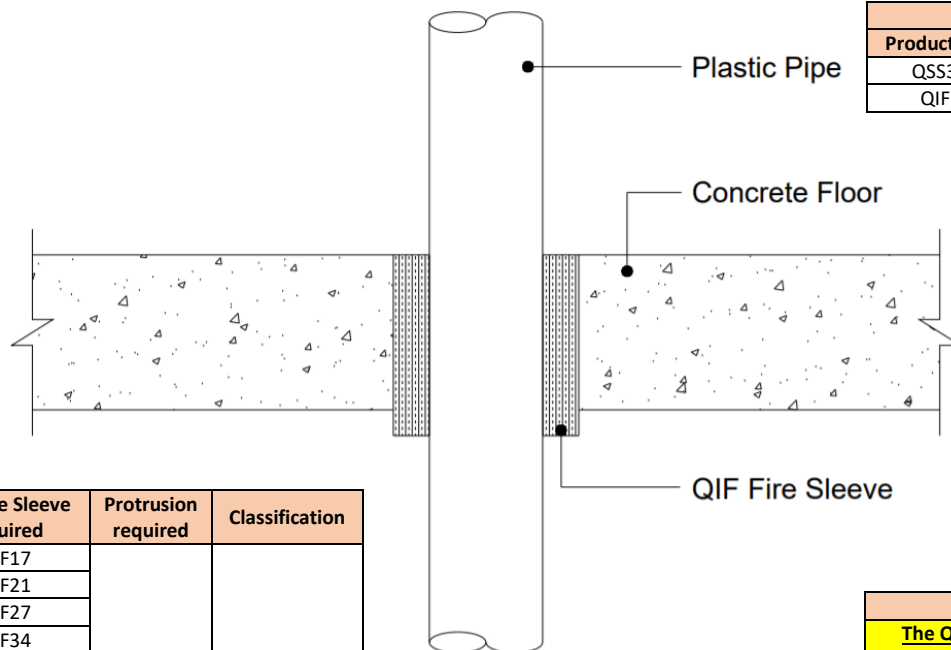

Quelfire Products Required

Product Code	Description
QSS310	QuelStop Intumescent Acrylic Sealant
QIF??	QIF Insulated Fire Sleeve

Protrusion Required	Page No.
Yes	1
No	2

Service Type	Size of Services	Pipe Wall Thickness	Recommend hole Dia.	QIF Fire Sleeve required	Protrusion required	Classification
U-PVC/ C-PVC* pipe	Ø15 - 19mm	3.2mm	Ø67mm	QIF17	≥25mm	EI 120 U/C
	Ø19 - 23mm		Ø71mm	QIF21		
	Ø25 - 29mm		Ø77mm	QIF27		
	Ø32 - 36mm		Ø84mm	QIF34		
	Ø40 - 44mm		Ø92mm	QIF42		
	Ø46 - 50mm		Ø98mm	QIF48		
	Ø52 - 56mm		Ø104mm	QIF54		
	Ø58 - 62mm		Ø110mm	QIF60		
	Ø65 - 69mm		Ø117mm	QIF67		
	Ø74 - 78mm		Ø126mm	QIF76		
	Ø78 - 82mm		Ø130mm	QIF80		
	Ø87 - 91mm		Ø139mm	QIF89		
	Ø100 - 104mm		Ø152mm	QIF102		
	Ø106 - 110mm		Ø158mm	QIF108		
	Ø112 - 116mm		Ø164mm	QIF114		
	Ø125 - 129mm		Ø177mm	QIF127		
	Ø138 - 142mm		Ø190mm	QIF140		
	Ø157 - 160mm		Ø209mm	QIF159		

* U-PVC according to EN 1329-1, EN 1452-1 and EN1453-1 and C-PVC according to EN 1566-1.

Chemical Compatibility

The QIF Insulated Fire Sleeve has been approved by Lubrizol to be used with their CPVC pipe systems.

Spacing as per BS EN 1366-3: 2021, Section 13.7

* Please also consider any requirements that the wall manufacturer has with regards to spacing between openings.

Minimum distance from edge of opening to another aperture with a service penetration tested to BS EN 1366-3	100mm*
Minimum distance from edge of opening to another aperture with a penetration <u>not</u> tested to BS EN 1366-3	200mm*

Test standard:	BS EN1366-3 & EN13501-2
Substrate minimum thickness:	150mm
First Service Support:	≤450mm
Drawing Scale:	Not to Scale
Issue Number:	2
Date of Issue:	January 2023
Detail Reference:	QIF-CF150-01

Important Information:

- The supporting construction must be installed in accordance with the manufacturer's guidelines and must be capable of achieving the required fire rating of the firestop.
- All Services should be adequately supported either side of the firestop to ensure that no load is transferred onto the firestop seal.

Scope and Liability:

- Any Information provided by or on behalf of Quelfire Limited is provided for general information only. It is not intended to amount to advice on which you should rely. You must obtain professional or specialist advice before taking, or refraining from, any recommendation or action.
- The summary is not exhaustive and does not consider all issues relevant to the enquiry. It is limited to the information and time available to us. We have not verified any information made available to us by you or any other source, nor have we carried out a physical inspection of any property. We make no representations, warranties or guarantees, whether expressed or implied, that any information is accurate, complete or up to date.
- We do not accept a duty of care to you or any other person in respect of the enquiry, nor do we accept any liability to you or any other person for any loss arising out of or in connection with the enquiry or any reply provided by us. Different limitations and exclusions of liability arising as a result of the supply of any products or services by us to you, and these will be set out in our terms and conditions of supply, a copy of which is available on request.
- Full terms and conditions of sale are available at <https://www.quelfire.co.uk/terms-conditions-of-sale/>

QIF-CF150-01

Plastic pipes penetrating a concrete floor (150mm or thicker)

This standard detail is intended for general information only and all details should be checked against all relevant supporting test evidence, certification and installation guidelines. In line with the company's policy of continual development, details are subject to change and/ or withdrawal therefore you must ensure this is the latest published detail and instructions.

Additional Instructions						
The floor must have a minimum thickness of 150mm and comprise of concrete or aerated concrete, with a minimum density of 670kg/m³.						
Once positioned correctly the perimeter of the QIF should be sealed with QuelStop Intumescent Acrylic Sealant.						
BS EN 1366-3:2021 Section 13.7 - The distance between the aperture edges of penetration seals in a building element shall be as tested or minimum 100mm. the distance between the aperture edge of a penetration seal and any other penetration (e.g., door) in a building element shall be minimum 200mm.						
Service Type	Size of Services	Pipe Wall Thickness	Recommend hole Dia.	QIF Fire Sleeve required	Classification	
U-PVC/ C-PVC* pipe	Ø15 - 19mm	3.0mm	Ø67mm	QIF17	EI 120 U/C	
	Ø19 - 23mm		Ø71mm	QIF21		
	Ø25 - 29mm		Ø77mm	QIF27		
	Ø32 - 36mm		Ø84mm	QIF34		
	Ø40mm		Ø92mm	QIF42		
PE, PE-X, ABS, SAN-PVC** Pipe	Ø15 - 19mm	3.0 – 6.2mm	Ø67mm	QIF17		
	Ø19 - 23mm		Ø71mm	QIF21		
	Ø25 - 29mm		Ø77mm	QIF27		
	Ø32 - 36mm		Ø84mm	QIF34		
	Ø40 - 44mm		Ø92mm	QIF42		
	Ø46 - 50mm	6.2mm	Ø98mm	QIF48		
	Ø52 - 56mm		Ø104mm	QIF54		
	Ø58 - 62mm		Ø110mm	QIF60		
	Ø65 - 69mm		Ø117mm	QIF67		
	Ø74 - 78mm		Ø126mm	QIF76		
	Ø78 - 82mm		Ø130mm	QIF80		
	Ø87 - 91mm		Ø139mm	QIF89		
	Ø100 - 104mm		Ø152mm	QIF102		
	Ø106 - 110mm		Ø158mm	QIF108		
	Ø112 - 116mm		Ø164mm	QIF114		
	Ø125 - 129mm		Ø177mm	QIF127		
	Ø138 - 142mm		Ø190mm	QIF140		
	Ø157 - 160mm		Ø209mm	QIF159		
	* U-PVC according to EN 1329-1, EN 1452-1 and EN1453-1 and C-PVC according to EN 1566-1.					
**PE in accordance with EN1519-1, EN1266-1, EN 12201-2 and EN ISO 15494, PE-X in accordance with EN ISO 15875-2, ABS in accordance with EN 1455-1 and EN ISO 15493 as well as SAN+PVC in accordance with ISO 19220.						

Quelfire Products Required	
Product Code	Description
QSS310	QuelStop Intumescent Acrylic Sealant
QIF??	QIF Insulated Fire Sleeve

Protrusion Required	Page No.
Yes	1
No	2

Chemical Compatibility	
The QIF Insulated Fire Sleeve has been approved by Lubrizol to be used with their CPVC pipe systems.	

Spacing as per BS EN 1366-3: 2021, Section 13.7	
* Please also consider any requirements that the wall manufacturer has with regards to spacing between openings.	
Minimum distance from edge of opening to another aperture with a service penetration tested to BS EN 1366-3	100mm*
Minimum distance from edge of opening to another aperture with a penetration <u>not</u> tested to BS EN 1366-3	200mm*

Test standard:	BS EN1366-3 & EN13501-2
Substrate minimum thickness:	150mm
First Service Support:	≤450mm
Drawing Scale:	Not to Scale
Issue Number:	2
Date of Issue:	January 2023
Detail Reference:	QIF-CF150-01

Important Information:

- The supporting construction must be installed in accordance with the manufacturer's guidelines and must be capable of achieving the required fire rating of the firestop.
- All Services should be adequately supported either side of the firestop to ensure that no load is transferred onto the firestop seal.

Scope and Liability:

- Any information provided by or on behalf of Quelfire Limited is provided for general information only. It is not intended to amount to advice on which you should rely. You must obtain professional or specialist advice before taking, or refraining from, any recommendation or action.
- The summary is not exhaustive and does not consider all issues relevant to the enquiry. It is limited to the information and time available to us. We have not verified any information made available to us by you or any other source, nor have we carried out a physical inspection of any property. We make no representations, warranties or guarantees, whether expressed or implied, that any information is accurate, complete or up to date.
- We do not accept a duty of care to you or any other person in respect of the enquiry, nor do we accept any liability to you or any other person for any loss arising out of or in connection with the enquiry or any reply provided by us. Different limitations and exclusions of liability arising as a result of the supply of any products or services by us to you, and these will be set out in our terms and conditions of supply, a copy of which is available on request.
- Full terms and conditions of sale are available at <https://www.quelfire.co.uk/terms-conditions-of-sale/>